

GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

Range: GS

The glass and dishwashers of the GS series are ideal for bars, pubs, restaurants and hotels.

These undercounter machines, with a redesigned control panel, feature a wide loading capacity granting the highest performance at a reasonable price. According to the user's needs the machine can be customized thanks to many optional features such as water softener, detergent dispenser and drain pump.



FEATURES

- Solid structure in AISI 304 S/S
- Sound and heat proof double skin door
- Door with anti-shock system
- Deep-drawn and sloped tank for a perfect total drain
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Innovative system of grouped wash and rinse arms made of composite materials
- Easy to remove nozzles to help with daily cleaning operations
- Overflow and drain pipes integrated system for a triple protection of the wash pump
- Non-return valve to prevent the water backflow
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- Rinse aid dispenser

OPTIONS

- Special voltages
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Final rinse with cold water
- Break Tank
- WRAS Break Tank
- Booster pump
- Built-in water softener with automatic regeneration
- Surface filters

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY



320 H



Ø 345




500x500

RACK EQUIPMENT

- 1 X C40
- 1 X C44
- 1 X 15060



GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

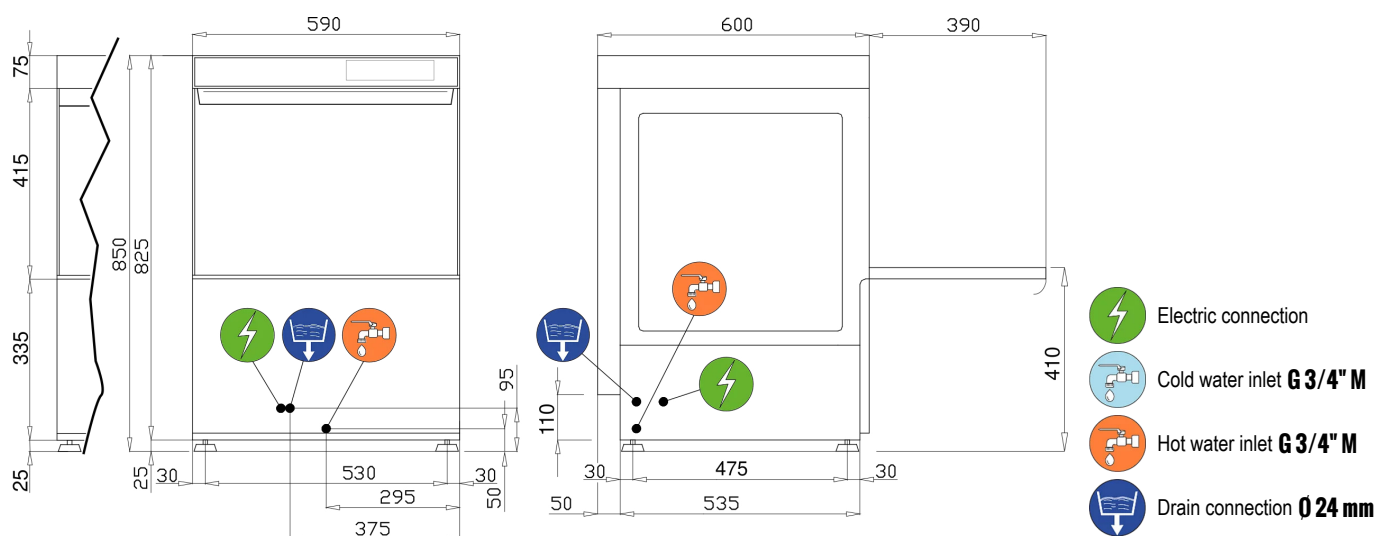

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	590
Depth	mm	600
Height (screwed foot)	mm	850
Weight (standard version)	kg	57

TECHNICAL DATA

Basket dimensions	mm	500x500
Glasses maximum useful height	mm	320
Maximum dish diameter	mm	345
Maximum level of water discharge	mm	95
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	29
Tank heating element	kW	2.7
Boiler capacity	l	5.7
Boiler heating element	kW	4.5
Wash pump power	kW	0.65
Wash pump flow rate	l/min	340
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	5.15

GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

CYCLES			
Cycle number		1	2
Cycle length	s	120	180
Cycle productivity (racks/h) - 55°C inlet water		30	20
Cycle productivity (racks/h) - 10°C inlet water		21	20
Cycle water consumption	l	2.3	2.3
Rinsing temperature setting	°C	85	85
Washing temperature setting	°C	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.