

ROBUST AND ESSENTIAL GLASS & DISHWASHERS

Range: CS

You asked and we listened! We are thrilled to announce our brand new range: CS.

These robust and essential glass and dishwashers simply make sense. Nothing superfluous: solid S/S body with double skin door, sloped tank, innovative and light arms, controlled temperatures and, only if needed, detergent dispenser and drain pump.

Wash, rinse, restart. It is really that simple.



FEATURES


- Solid structure in AISI 304 S/S
- Sound and heat proof double skin door
- Door with anti-shock system
- Sloped tank with screwed basket rails
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Innovative system of grouped wash and rinse arms made of composite materials
- Easy to remove nozzles to help with daily cleaning operations
- Overflow and drain pipes integrated system for a triple protection of the wash pump
- 1 wash cycle
- Non-return valve to prevent the water backflow
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- Rinse aid dispenser
- Rinse aid dispenser

OPTIONS

- Built-in peristaltic detergent dispenser
- Drain pump

Option compatibility to be confirmed by the manufacturer after verification


CAPACITY




320 H Ø 345 500x500

RACK EQUIPMENT

- 1 X C40
- 1 X C44
- 1 X 15060



ROBUST AND ESSENTIAL GLASS & DISHWASHERS

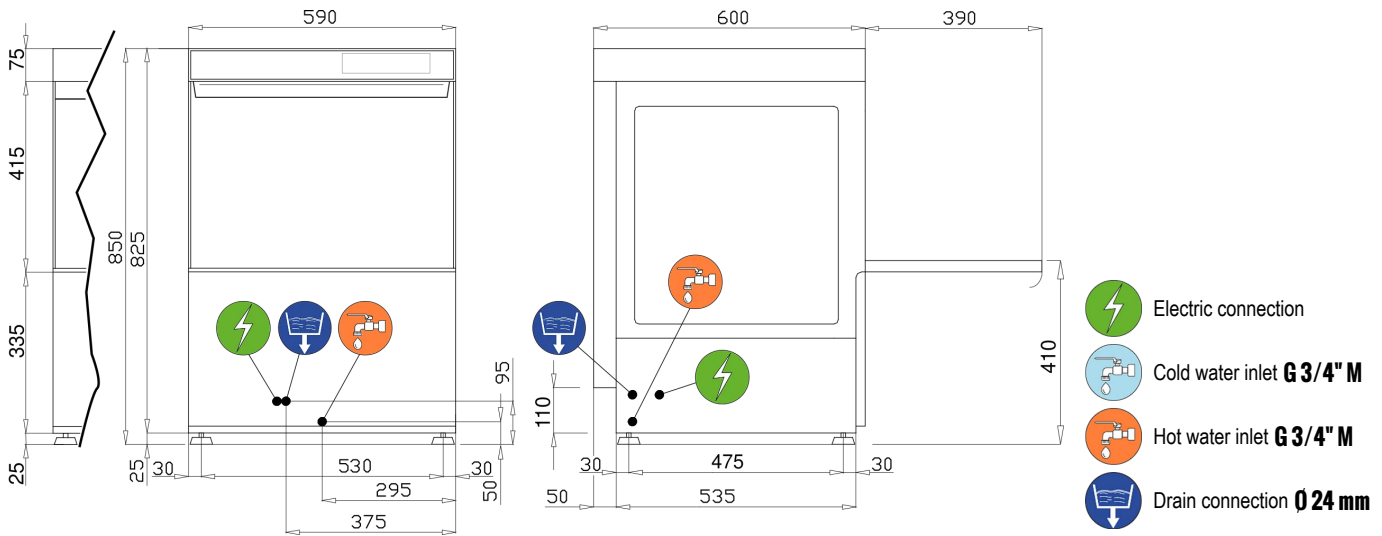

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	590
Depth	mm	600
Height (screwed foot)	mm	850
Weight (standard version)	kg	57

TECHNICAL DATA

Basket dimensions	mm	500x500
Glasses maximum useful height	mm	320
Maximum dish diameter	mm	345
Maximum level of water discharge	mm	95
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	29
Tank heating element	kW	1.25
Boiler capacity	l	5.7
Boiler heating element	kW	2.8
Wash pump power	kW	0.4
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage		220-240 V 50 Hz
Total installed power	kW	3.2

CYCLES

Cycle number		1
Cycle length	s	120
Cycle productivity (racks/h) - 55°C inlet water		30
Cycle productivity (racks/h) - 10°C inlet water		14
Cycle water consumption	l	2.3 (minimum pressure)
Rinsing temperature setting	°C	85
Washing temperature setting	°C	55

ROBUST AND ESSENTIAL GLASS & DISHWASHERS

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.